

Maintenance Indicators

1. Features

Filter elements are economically used only if their dirt holding capacity is fully exploited. This is achieved by using filter housings with a maintenance indicator.

Filtration Group manufactures maintenance indicators of the following designs:

- Differential pressure indicators
- Pressure indicators/switches/gauges
- Vacuum switches/gauges

With any filter element the collection of dirt particles continuously reduces the number of open pores or, in other words: The open cross section for allowing the liquid to flow is continuously reduced. Thus the pressure on the upstream side of the element (dirt side) increases continuously.

With pressure filters, the pressure is measured upstream and downstream of the filter element (differential pressure). With return line filters the pressure is measured only on the upstream side because, depending on the tank design, atmospheric pressure exits on the downstream side of the filter element is measured analog. With suction filters the vacuum is measured downstream.

A piston with attached magnet is moved against the force of a spring, with which the indicating point is determined by the piston surface. A homopolar poled magnet is fitted in the outer part in the indicating button.

The closer the pole-springs move towards each other, the stronger is the force with the magnets mutually repel, until finally the red button on the indicator pops out.

This red button remains visible until it is pushed in during the daily check which is to be performed while the plant is at operating temperature. If the button pops out immediately after being pushed in, the filter element must be replaced latest at the end of the shift.

This optical function may also be used for generating contactless electrical signals. For this purpose an electrical upper part is pushed over the hydraulic/optical part. This upper part incorporates all electrical switching elements.

- Optical and electrical indicator with standard check function
- Normally open/normally closed combination - standard feature
- Electrical function, easy to install at a later time
- Two-step indication, at 75 % and 100 % optional
- Signal lock out up to approx. 30 °C optional
- Rugged, non-bypass design
- Optimal element exploitation
- Worldwide distribution



2. Differential pressure indicators

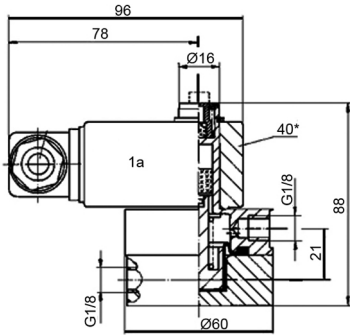


Fig. 1

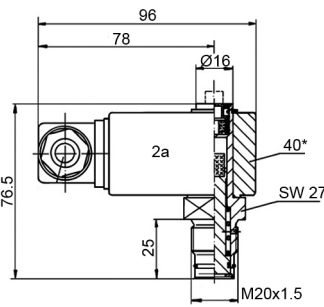


Fig. 2

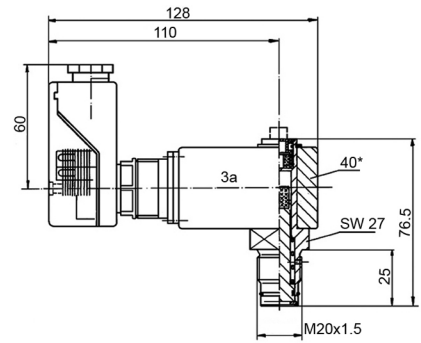


Fig. 3

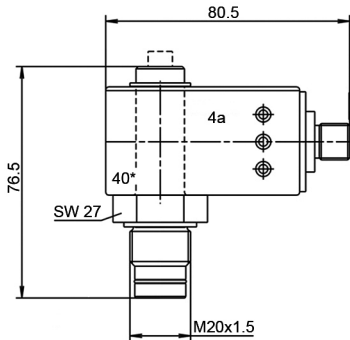


Fig. 4

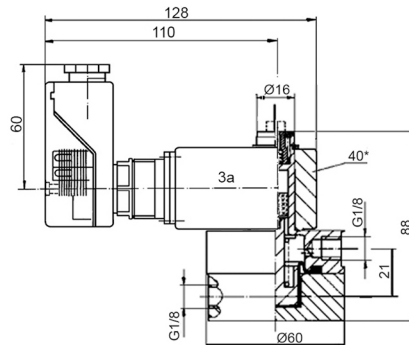


Fig. 15

40* = 40 mm wide

Differential pressure indicators

Nominal pressure [bar]	Temperature [°C]	Type	Order number	Indicator setting [bar]	Indication	Contact type*	Fig.	Material lower section	Material upper section
10	-30 - +120	PiS 3087	77738990	1.2	visual	-	1	Al	PA 6
		PiS 3086	77737513		visual/electr.	1	1 + 1a		
		PiS 3104	78236994		visual/electr.	4	1 + 3a (15)		
160	-30 - +120	PiS 3097	70328693	1.25	visual/elekt	1	2 + 2a	Al	PA 6
160	-30 - +120	PiS 3098	77669971	2.2	visual	-	2	Al	PA 6
		PiS 3097	77669948		visual/electr.	1	2 + 2a		
		PiS 3116	78308074		visual/electr.	3	2 + 2a		
160	-30 - +120	PiS 3119	78309122	1.7/2.2	visual/electr.	2	2 + 2a	Al	PA 6
		PiS 3012	78308454		visual/electr.	4	3 + 3a		
		PiS 3131	79760869		visual/electr.	5	3 + 3a		
		PiS 3141	79761859		visual/electr.	6	3 + 3a		
		PiS 3151	79761909		visual/electr.	8	4 + 4a		
		PiS 3154	76300339		visual/electr.	9	4 + 4a		
160	-30 - +120	PiS 3157	76326706	3.5	visual/electr.	11	4 + 4a	Al	PA 6
		PiS 3098	77938582		visual	-	2		
160	-30 - +120	PiS 3097	78236648	5.0	visual/electr.	1	2 + 2a	Al	PA 6
		PiS 3098	77669989		visual	-	2		
		PiS 3116	78308082		visual/electr.	3	2 + 2a		
160	-30 - +120	PiS 3119	78309130	3.7/5.0	visual/electr.	2	2 + 2a	Al	PA 6
		PiS 3012	78308447		visual/electr.	4	3 + 3a		
		PiS 3157	76326714		visual/electr.	11	4 + 4a		
		PiS 3131	79760877		visual/electr.	5	3 + 3a		
		PiS 3141	79761867		visual/electr.	6	3 + 3a		
		PiS 3151	79761917		visual/electr.	8	4 + 4a		
		PiS 3154	76300321		visual/electr.	9	4 + 4a		

Differential pressure indicators									
Nominal pressure [bar]	Temperature [°C]	Type	Order number	Indicator setting [bar]	Indication	Contact-type*	Fig.	Material lower section	Material upper section
400	-30 - +120	PiS 3093	77669898	2.2	visual	-	2	CuZn	PA 6
		PiS 3092	77669856		visual/electr.	1	2 + 2a		
		PiS 3115	78308041		visual/electr.	3	2 + 2a		
400	-30 - +120	PiS 3105	77970387	1.7/2.2	visual/electr.	2	2 + 2a	CuZn	PA 6
		PiS 3102	77942139		visual/electr.	4	3 + 3a		
		PiS 3132	79760919		visual/electr.	5	3 + 3a		
		PiS 3142	79761875		visual/electr.	6	3 + 3a		
		PiS 3152	79761925		visual/electr.	8	4 + 4a		
		PiS 3155	76300354		visual/electr.	9	4 + 4a		
		PiS 3158	76326722		visual/electr.	11	4 + 4a		
400	-30 - +120	PiS 3093	77669914	5.0	visual	-	2	CuZn	PA 6
		PiS 3092	77669864		visual/electr.	1	2 + 2a		
		PiS 3115	78308058		visual/electr.	3	2 + 2a		
		PiS 3115 M12	79764010		visual/electr.	10	4 + 4a		
400	-30 - +120	PiS 3105	77970395	3.7/5.0	visual/electr.	2	2 + 2a	CuZn	PA 6
		PiS 3102	77942147		visual/electr.	4	3 + 3a		
		PiS 3155	76300362		visual/electr.	9	4 + 4a		
		PiS 3132	79760919		visual/electr.	5	3 + 3a		
		PiS 3142	79761883		visual/electr.	6	3 + 3a		
		PiS 3152	79761933		visual/electr.	8	4 + 4a		
		PiS 3158	76326730		visual/electr.	11	4 + 4a		
400	-30 - +120	PiS 3093	77669880	8	visual	-	2	CuZn	PA 6
		PiS 3092	77669872		visual/electr.	1	2 + 2a		
		PiS 3115	78308066		visual/electr.	3	2 + 2a		
450	-30 - +120	PiS 3193	77844061	2.2	visual	-	2	1.4301	PA 6
		PiS 3192	78308488		visual/electr.	1	2 + 2a		
		PiS 3110	79353574		visual/electr.	7	3 + 3a		
450	-30 - +120	PiS 3193	78308538	5.0	visual	-	2	1.4301	PA 6
		PiS 3192	78308546		visual/electr.	1	2 + 2a		
		PiS 3110	79353582		electrical	7	3 + 3a		

*Contact type

- 1 Normally open/normally closed; 1 setting point; wiring box DIN EN 175301-803; max. 250 V AC/200 V DC; max. 1 A
- 2 Normally closed; 2 setting points; wiring box DIN EN 175301-803; max. 150 V; max. 1 A
- 3 Change-over contact; 1 setting point; wiring box DIN EN 175301-803; max. 150 V; max. 1 A
- 4 Change-over contact; 2 setting points; LED; Mercedes Benz Norm DBL 9666 EA; wiring box DIN EN 175201-804; max. 10-30 V; max. 1 A
- 5 Change-over contact; 2 setting points; LED; signal suppression; time delay; wiring box DIN EN 175201-804; 10-30 V; max. 1 A
- 6 Change-over contact; 2 setting points; LED; signal suppression; wiring box DIN EN 175201-804, 10-30 V; max. 1 A
- 7 Analog signal 4-20 mA; 2 setting points; LED; signal cold start; wiring box DIN EN 175201-804; 24 V; max. 1 A
- 8 Normally open/normally closed; 2 setting points; LED; signal suppression; plug connection M12x1; 10-30 V; max. 1 A
- 9 Normally open/normally closed; 2 setting points; LED; plug connection M12x1; 10-30 V; max. 1 A
- 10 Change-over contact; 1 setting point; plug connection M12x1; 150 V; max. 1 A
- 11 Normally closed/normally closed; 2 setting points; LED; plug connection M12x1; 150 V; max. 1 A

3. Pressure indicators/pressure switches

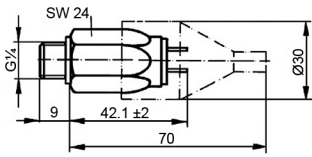


Fig. 5

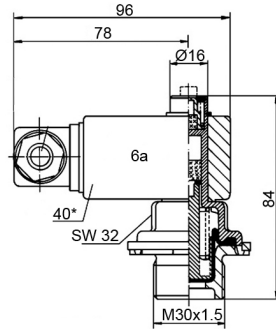


Fig. 6

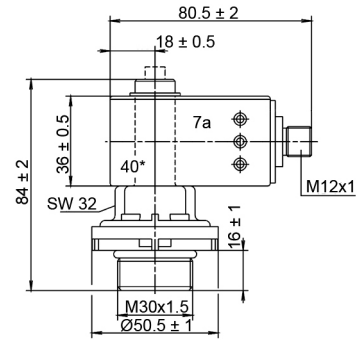


Fig. 7

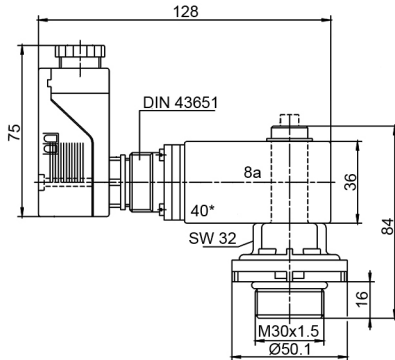


Fig. 8

40* = 40 mm wide

Pressure indicators/pressure switches									
Nominal pressure [bar]	Temperature [°C]	Type	Order number	Indicator setting [bar]	Indication	Contact type*	Fig.	Material lower section	Material upper section
10	-10 - +80	PiS 3084	77669781	1.2	visual	-	6	PA 66	PA 6
		PiS 3085	77669807		visual/electr.	1	6 + 6a		
		PiS 3125	78308033		visual/electr.	3	6 + 6a		
10	-10 - +80	PiS 3106	78309155	0.9/1.2	visual/electr.	2	6 + 6a	PA 66	PA 6
		PiS 3103	77942170		visual/electr.	4	8 + 8a		
10	-10 - +80	PiS 3084	77737802	2.2	visual	-	6	PA 66	PA 6
		PiS 3085	77738032		visual/electr.	1	6 + 6a		
		PiS 3125	78308108		visual/electr.	3	6 + 6a		
		PiS 3125 M12	79764747		visual/electr.	10	7 + 7a		
10	-10 - +80	PiS 3156	76300370	1.7/2.2	opt./elektr.	9	7 + 7a	PA 66	PA 6
		PiS 3159	76326748		visual/electr.	11	7 + 7a		
		PiS 3143	79761891		visual/electr.	6	8 + 8a		
		PiS 3153	79761941		visual/electr.	8	7 + 7a		
		PiS 3133	79760927		visual/electr.	5	6 + 3a		
		PiS 3106	78308850		visual/electr.	2	6 + 6a		
		PiS 3103	77970429		visual/electr.	4	8 + 8a		
10	-25 - +85	DSS/1.2	77863814	1.2	electrical	norm. open	5	galvanized steel	delivered with protection cap
		DSO/1.2	77870587		electrical	n. closed	5		
10	-25 - +85	DSS/2.2	77845845	2.2	electrical	norm. open	5		
		DSO/2.2	77870595		electrical	n. closed	5		
10	-25 - +85	DSS/5	77863822	5.0	electrical	norm. open	5		
		DSO/5	77870603		electrical	n. closed	5		

*Contact type see remarks below 2. Differential pressure indicators

4. Vacuum/pressure gauges

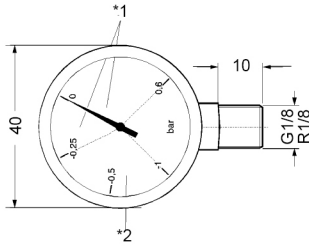


Fig. 9
*1 = Green area/*2 = Red area

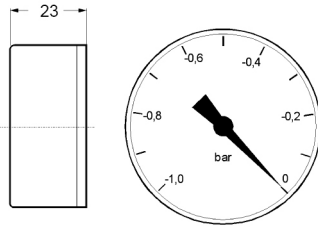


Fig. 10

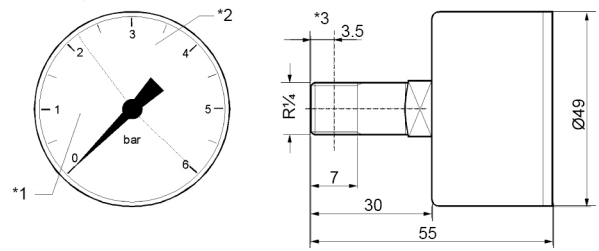


Fig. 11
*3 = Metering level

Vacuum/pressure gauges							
Nominal size [NG]	Type	Order number	Indicating range [bar]	Connection size	Fig.	Class	Dial face
40	Vacuum gauge	76345763	-1 - +0.6	R1/8 conical	9	min. 2.5	Red/Green area sep. line -0.25 bar
		77545908		G1/8	9		white
50		77617558	-1 - 0	R1/4 conical	10		
50	Pressure gauge	78381998	0 - 6	R1/4 conical	11		Red/Green area sep. line 2.2 bar

5. Vacuum switches

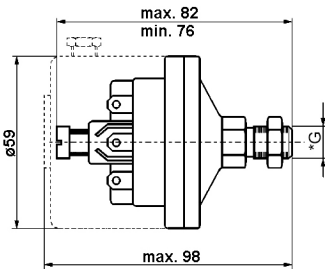


Fig. 12
*G = Connection

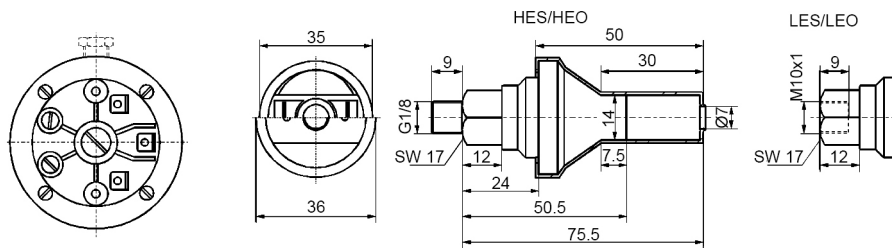


Fig. 13
HES/HEO only for fluids, LES/LEO only for air

Vacuum switches									
Permissible over-pressure [bar]	Temperature [°C]	Type	Order number	Switch setting[mbar]	Contact type	Fig.	Connection *G	Material lower section	Material upper section
0.5	-10 - +70	PiS 3070	77669690	-15 - -80	single pole change-over switch, snap-in joint	12	G1/4	GD-Al	PA 6
1			77669724	-50 - -600			G1/8		
0.1	-20 - +80 short-term +120	HES 2200 BP	78308892	-200 ±10	normally open	13	G1/8 outside	GD-ZnAl	PC
		HEO 2200 BP	78308900		normally closed				
		LES 250 I	78308918	-50 ±4	normally open	M10x1 inside			
		LEO 250 I	78308926		normally closed				

6. Vacuum indicators/air filters

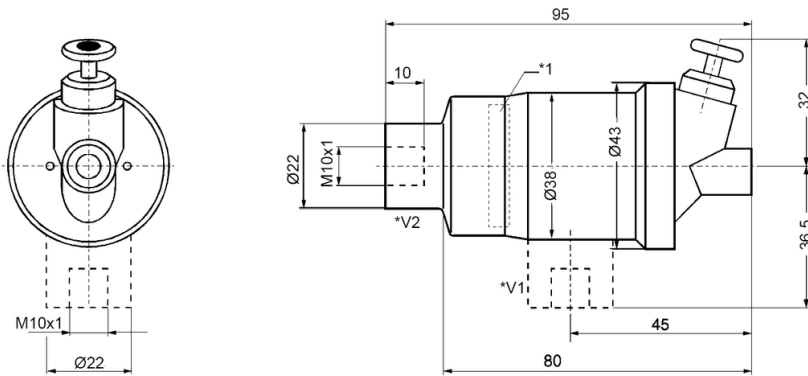


Fig. 14

*1 = Indication: position of display in mbar

*V1 = Version 1

*V2 = Version 2

Vacuum indicators/air filters						
Temperature [°C]	Type	Order number	Indicator setting ±10 % [mbar]	Indication type	Fig.	Version
-40 - +110	TB 745	78309056	-50	optical self locking	14	1
	TB 745/1	78309064	-50			2
	TB 746/1	78309049	-65			2

7. Accessories


7.1 Seal kits				
Type	NBR	FPM	EPDM	
	Order number			
PiS 3092, 3093, 3102, 3105, 3115, 3132, 3142, 3152, 3155, 3192, 3193, 3158	77760275	77760283	77760291	
PiS 3012, 3097, 3098, 3116, 3119, 3131, 3141, 3151, 3154, 3157	77760309	77760317	77760325	
PiS 3084, 3085, 3103, 3106, 3125, 3133, 3143, 3153, 3156, 3159	78383382	78383390	78383408	
PiS 3086, 3087, 3104	77760242	77760259	-	

7.2 Electrical expansion kit/spare parts	
Designation	Order number
Electrical upper section normally open/closed for PiS 3084, 3087, 3093, 3098, 3193 (contact type 1)	77536550
Wiring box with lamp insert 12 - 230 V for electrical upper section normally open (acc. to DIN EN 175301-803)	78307548
Electrical upper section change-over contact for PiS 3084, 3087, 3093, 3098, 3193 (contact type 3)	78308017
Wiring box with 2 LEDs 10 - 30 V for electrical upper section change over contact (acc. to DIN EN 175301-803)	78308025

Designation	Order number
Electrical upper section change-over contact M12x1 für PiS 3084, 3087, 3093, 3098, 3193 (contact type 10)	79764036
Electrical upper section 2SP-LED-M12x1-SU (contact type 8) spare part for 2 setting points indicator!	76116651
Electrical upper section 2SP-LED-M12x1 (contact type 9) spare part for 2 setting points indicator!	76300412
Electrical upper section W-2SP-LED-SU-VERZ (contact type 5) spare part for 2 setting points indicator!	79760943
Electrical upper section W-2SP-LED-SU (contact type 6) spare part for 2 setting points indicator!	76118590
Electrical upper section W-2SP/Ö-LED-M12x1 (contact type 11) spare part for 2 setting points indicator!	76326755
Electrical upper section normally closed with signal suppression PiS 3003	77765357
Electrical upper section normally open with signal suppression PiS 3002	77765365

7.3 Mounting block for differential pressure indicators (M20x1.5)

Designation	Order number
Mounting block (St)	77809098
Mounting block (1.4301), 450 bar	77698517

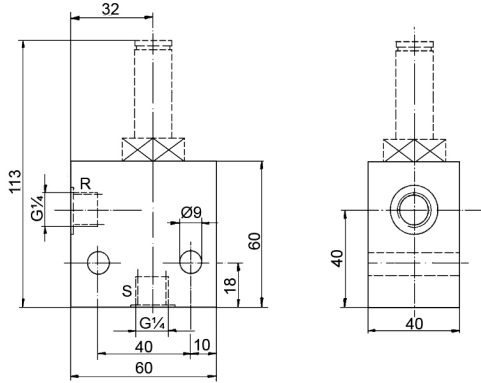


R = clean side
S = dirt side

8. Function


The magnetic field as previously described, contactless operates reed contacts in the electrical upper part. The desired contact type is selected by inverting upper part. Another option keeping the electrical signal electronically suppressed up to 30 °C operating temperature is also available. This eliminates false electrical signal during the cold start phase.

For efficient servicing it is desirable to have a pre-warning device (so that the filter element can be replaced, e.g. with the next tool change). For this purpose electrical upper parts with two indicating points, i.e. at 75 % and at 100 % of the indicator setting are available.

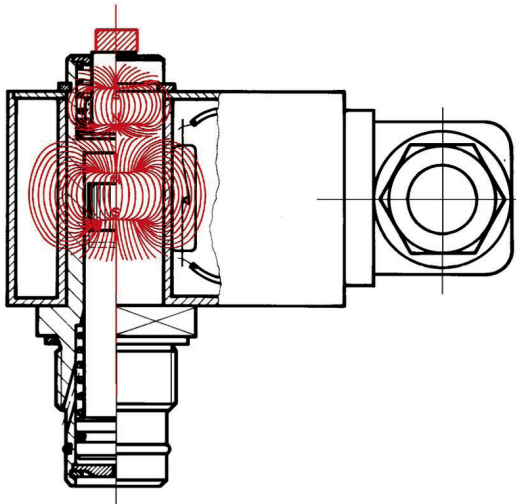


7.4 Protection cap

Designation	Order number
Protection cap for all visual pressure and differential pressure indicators, -20 °C to +80 °C Resistant to: gasoil, purifying agent, insolation, dust, salt, water, concret	78285330

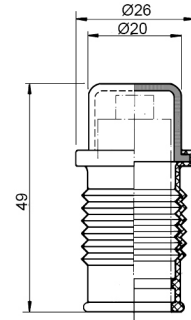

Pressure/vacuum gauges give an analog reading of the existing state of contamination of the filter elements. They require continuous control to ensure that the service time and reserve capacity are not unduly exceeded. If the contamination signal is disregarded, the filter element may collapse or, if a bypass valve is installed, part of the contamination fluid may reach the hydraulic components via the bypass valve and cause failure of the hydraulics.

Pressure/vacuum switches are provided with snap action switches, which ascertains that signal are issued only when the limit values have been fully reached.

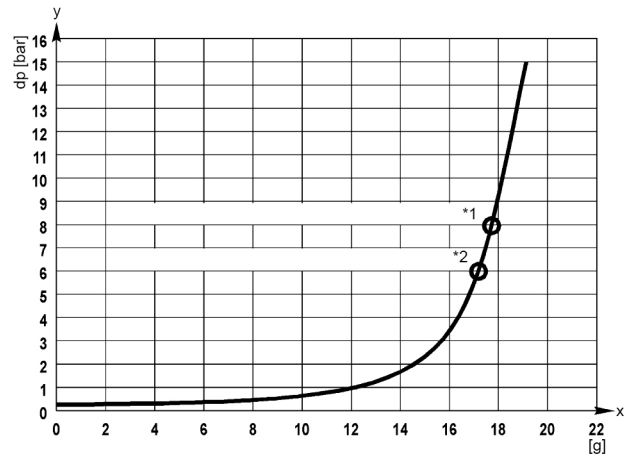

Dirt holding capacity - Δp curve

x = dirt holding capacity [g]

y = differential pressure Δp [bar]

*1 = signal step maintenance indicator 100 %

*2 = signal step maintenance indicator 75 %

9. Technical specifications

9.1 Contact type normally open/normally closed

Contact type 1

Types PiS 3085, 3086, 3092, 3097, 3192

Max. voltage: 250 V AC/ 200 V DC

Max. current: 1 A

Contact load: 70 W

Type of protection: IP 65 in inserted and secured status


Contact type : normally open/normally closed

Cable sleeve: M20x1.5

Wiring box: DIN EN 175 301-803

The switching function can be changed by turning the electric upper part by 180° (normally closed contact or normally open contact). The state on delivery is a normally closed contact.

By inductivity in the direct current circuit the use of suitable protection circuit should be considered. Electrical parts are insulated (plastic material housing).

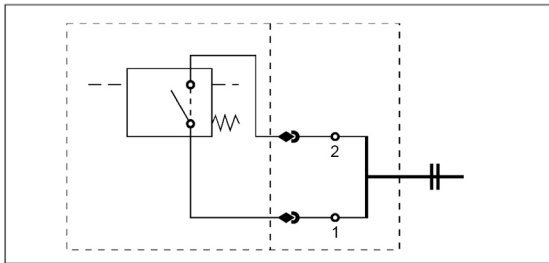

9.2 Contact type normally closed or open with signal suppression

Contact type normally closed

Type PiS 3003 (expansion kit)


Contact type normally open

Type PiS 3002 (expansion kit)

Signal suppression by thermorelay

Signal is released at +30 °C

for further technical details see 9.1

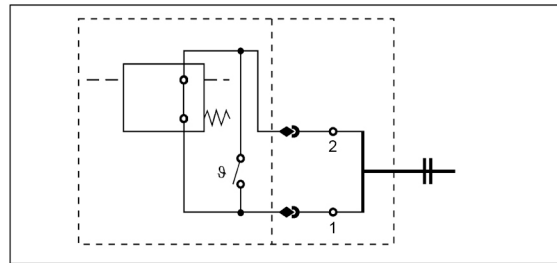

9.3 Contact type normally closed 2 setting points

Contact type 2

Types PiS 3105, 3106, 3119

1. setting point at 75 % of the indicating pressure


2. setting point at 100 % of the indicating pressure

Max. voltage: 150 V AC/DC

Max. current: 1 A

Contact load: 20 VA/20W

for further technical details see 9.1

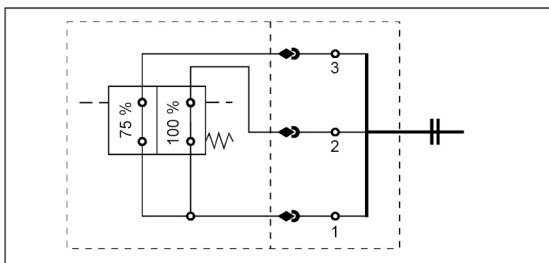

9.4 Contact type Change-over contact

Contact type 3


Types PiS 3115, 3116, 3125

Max. voltage: 150 V AC/DC

Max. current: 1 A

Contact load: 20 VA/20W

for further technical details see 9.1

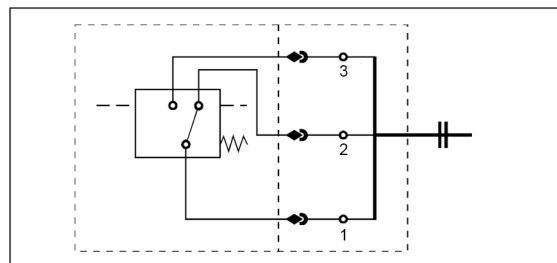


9.5 Contact type change-over contact, 2 setting points LED

Contact type 4

Types PiS 3012, 3102, 3103, 3104

1. setting point at 75 % of the indicating pressure
2. setting point at 100 % of the indicating pressure

Max. voltage: 10 - 30 V DC
 Max. current: 1 A
 Contact load: 20 VA/20 W
 Type of protection: IP 65 in inserted and secured status
 Plug connection: DIN EN 175201-804

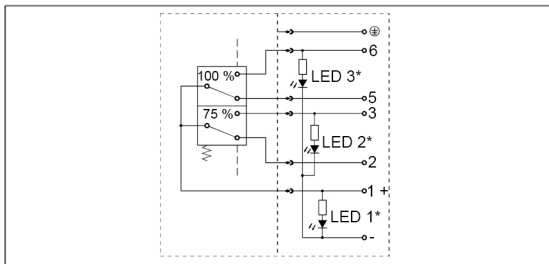


9.6 Wiring box with insert lamp

Will be supplied instead of standard connection.

Not to be combined with indicators with 2 setting points.

Max. voltage: 12-230 V AC/DC

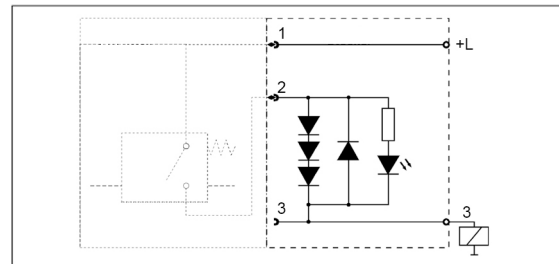


9.7 Contact type change-over contact, 2 setting points, LED, signal suppression, time delay

Contact type 5

Types PiS 3131, 3132, 3133

1. setting point at 75 % of the indicating pressure
2. setting point at 100 % of the indicating pressure

Max. voltage: 10 - 30 V DC
 Max. current: 1 A
 Contact load: 20 W
 Type of protection: IP 65 in inserted and secured status
 Plug connection: DIN EN 175201-804
 Signal suppression: by thermorelay
 Signal released: at + 30 °C
 Signal change down: at + 20 °C
 Impulse suppression K1 and K2 time delay 10 s

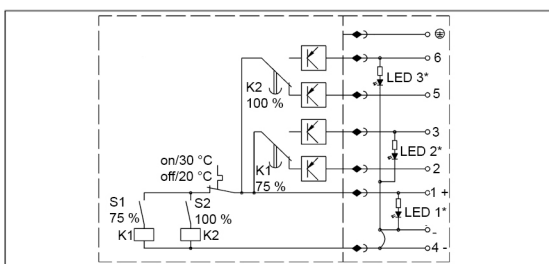


9.8 Contact type change-over contact, 2 setting points, LED, signal suppression

Contact type 6

Types PiS 3141, 3142, 3143

1. setting point at 75 % of the indicating pressure
2. setting point at 100 % of the indicating pressure

Max. voltage: 10 - 30 V DC
 Max. current: 1 A
 Contact load: 20 W
 Type of protection: IP 65 in inserted and secured status
 Plug connection: DIN EN 175201-804
 Signal suppression: by thermorelay
 Signal released: at + 30 °C
 Signal change down: at + 20 °C

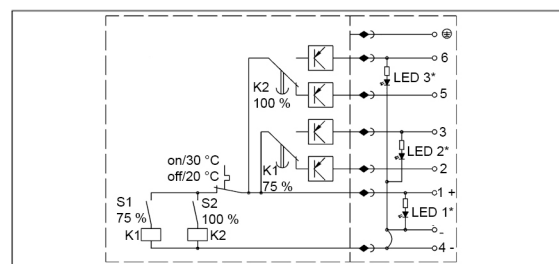

LED 1* = Operating LED green

LED 2* = Setting point 75 % LED yellow


LED 3* = Setting point 100 % LED red

9.9 Contact type analog 4-20 mA, 2 setting points, LED, signal suppression

Contact type 7

Types PiS 3110, 3120

Max. voltage:	24 V DC
Max. current:	200 mA
Resistance:	500 Ω
Type of protection:	IP 65 in inserted and secured status
Plug connection:	nach DIN EN 175201-804
Output signal:	4-20 mA
Outputs (PNP, max. 200 mA):	cold start signal 75 % setting point 100 % setting point
Signal damping:	20 s

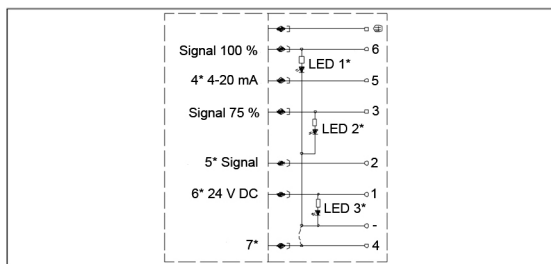


9.10 Contact type normally open/normally closed, 2 setting points, LED, signal suppression

Contact type 8

Types PiS 3151, 3152, 3153

1. setting point at 75 % of the indicating pressure (normally open)
2. setting point at 100 % of the indicating pressure (normally closed)

Max. voltage:	10 - 30 V DC
Max. current:	1 A
Contact load:	20 W
Type of protection:	IP 65 in inserted and secured status
Plug connection:	M12x1, 4 pole
Signal suppression:	by thermorelay
Signal release:	at + 30 °C
Signal change down:	at + 20 °C

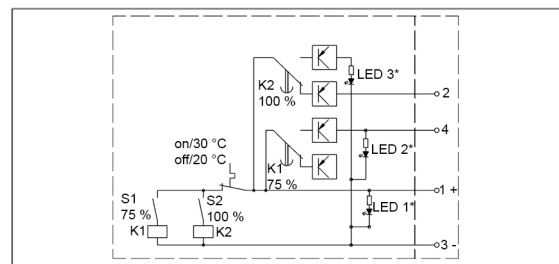


9.11 Contact type normally open/normally closed, 2 setting points

Contact type 9

PiS 3154, 3155, 3156

1. setting point at 75 % of the indicating pressure (normally open)
2. setting point at 100 % of the indicating pressure (normally closed)

Max. voltage:	10-30 V DC
Max. current:	1 A
Contact load:	20 W
Type of protection:	IP 65 in inserted and secured status
Plug connection:	M12x1, 4 pole

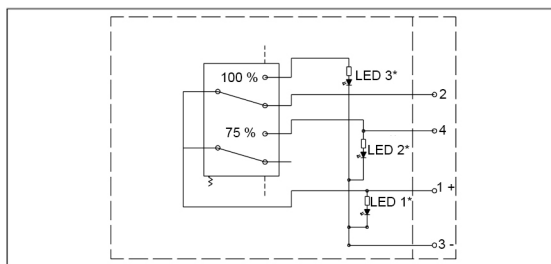


9.12 Contact type change-over contact

Contact type 10

PiS 3115-M12x1, 3116-M12x1, 3125-M12x1

Max. voltage:	150 V
Max. current:	1 A
Contact load:	20 W
Type of protection:	IP 65 in inserted and secured status
Plug connection:	M12x1, 4 pole

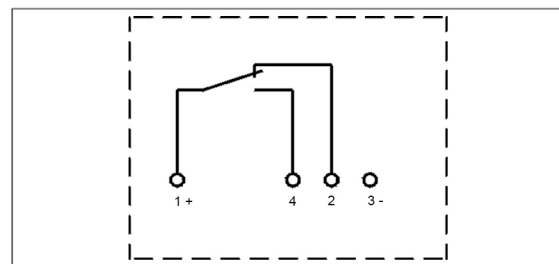

LED 1* = Operating LED green

LED 2* = Setting point 75 % LED yellow

LED 3* = Setting point 100 % LED red


9.13 Contact type normally closed, 2 setting points

Contact type 11

Types PiS 3157, 3158, 3159

1. setting point at 75 % of the indicating pressure (normally closed)
2. setting point at 100 % of the indicating pressure (normally closed)

Max. voltage:	10-30 V DC
Max. current:	1 A
Contact load:	20 W
Type of protection:	IP 65 in inserted and secured status
Plug connection:	M12x1, 4 pole

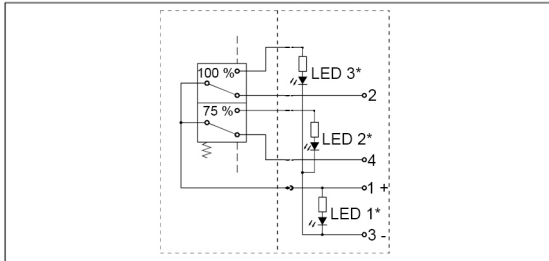

LED 1* = Operating LED green

LED 2* = Setting point 75 % LED yellow

LED 3* = Setting point 100 % LED red


9.15 Vacuum switch HEO/LEO

Contact type normally closed

Contact load HEO*:	42 V/6 W
Contact load LEO*:	24 V/6 W

* at resistive load

for further technical details see 9.14

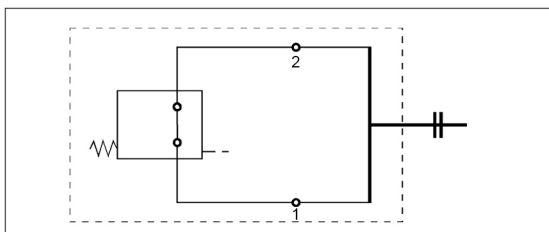


9.14 Vacuum switch HES/LES

Contact type normally open

Electrical connection:	AMP 6,3 DIN 43248
	bushings DIN 46247
	switch type 2 pole
Contact load HES*:	42 V/6 W
Contact load LES*:	24 V/6 W
Type of protection:	IP 54 - with protecting cap

* at resistive load

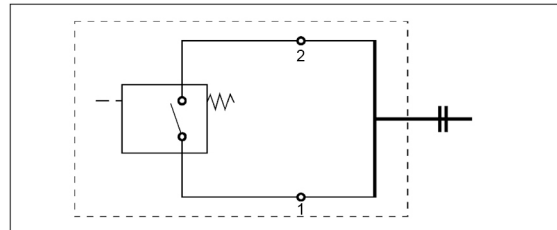


9.16 Vacuum switch PiS 3070

Contact type 1 pole change-over contact

Electrical connection:	AMP 6,3 DIN 43248
	bushings DIN 46247
Max. voltage:	230 V AC/DC
Max. current:	6 A
Type of protection:	IP 00 without cover
	IP 54 with cover

Position of installation: individual (position of installation is to be advised if setting point is adjusted)

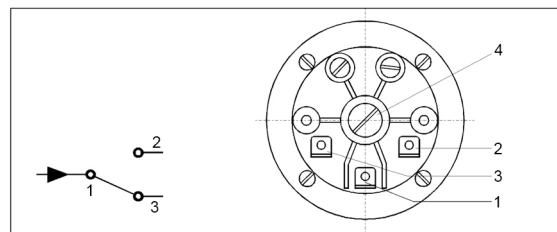

1 = Supply line
2 = Operating contact

3 = Normally closed contact
4 = Adjusting screw

9.17 Pressure switch DSS

Contact type: normally open


Electrical Connection: AMP 6,3 DIN 46248
bushings DIN 46247
switch type 2 pole

Max. voltage: 42 V

Max. current: 2 A

Contact load: 100 VA

Duty classification: 200/min

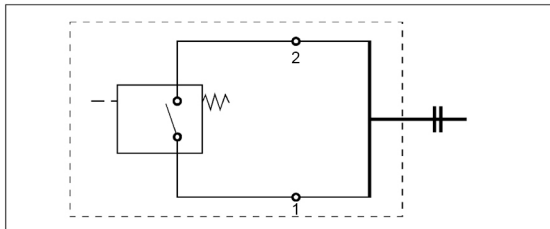

Maintenance indicators PiS 3084, 3087, 3093, 3098, 3193 can be mounted in 45°.

Tightening torque:

Maintenance indicator aluminum with threat M20x1.5
60 Nm

Maintenance indicator CuZn with threat M20x1.5
90 Nm


Maintenance indicator stainless steel with threat M20x1.5
90 Nm

Maintenance indicator plastic with threat M30x1.5
3 Nm

9.18 Pressure Switch DSO

Contact type: normally closed

for further technical details see 9.17

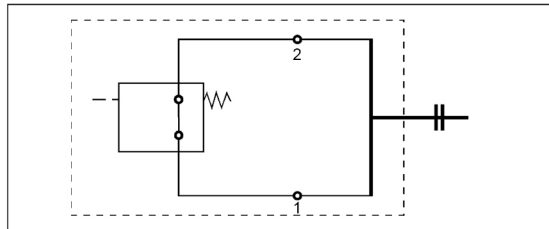

We draw attention to the fact that all values indicated are average values which do not always occur in specific cases of application: Our products are continually being further developed. Values, dimensions and weights can change as a result of this. Our specialized department will be pleased to offer you advice.

When using our filters in areas which are to be classified according to EU directive 2014/34/EU (ATEX), we recommend prior discussion with us. The standard version can be used for liquids based on mineral oil /corresponding to the fluids in Group 2 of Directive 97/23 EG Article 9). Please consult with us if using other media.

Subject to technical alterations without prior notice.

Filtration Group GmbH
Schleifbachweg 45
D-74613 Öhringen
Phone +49 7941 6466-0
Fax +49 7941 6466-429
sales@filtrationgroup.com
www.filtrationgroup.com
78357428.12/2016

Electrical Maintenance Indicators

PiS 3200

with AMP plug connection

1. Features

Filter elements are economically used only if their dirt holding capacity is fully exploited. A reliable indication of the optimal time to replace the element is therefore vital.

These maintenance indicators include an AMP Junior-Power-Timer plug connection and are available in normally open or normally closed contact type version.

Thanks to the Filtration Group modular system these maintenance indicators can be used with all Filtration Group pressure filters.



2. Differential pressure indicators

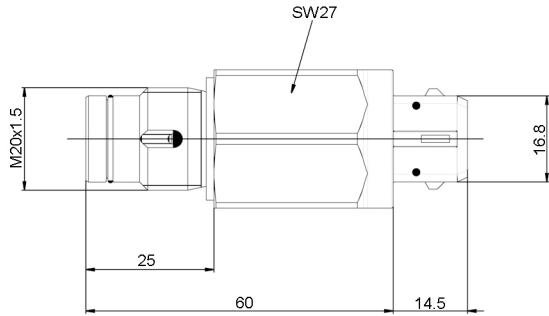


Fig. 1

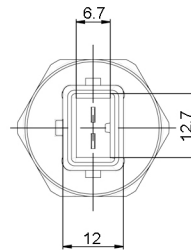


Fig. 2

Differential pressure indicators									
Nominal pressure [bar]	Temperature [°C]	Type	Order number	Indicator setting [bar]	Indication	Contact type*	Fig.	Material housing	Material plug connection
160	-30 - +120	PiS3203/2.2	70520455	2.2	electr.	norm. closed	1 + 2	Al	PA
		PiS3206/2.2	70520459			norm. open	1 + 2		
400	-30 - +120	PiS3204/5.0	70520457	5.0	electr.	norm. closed	1 + 2	CuZn	PA
		PiS3207/5.0	70520460			norm. open	1 + 2		

*Contact type

1 Normally open or normally closed; 1 setting point; AMP Junior-Power-Timer 2.8 2 poles; max. 48 V DC; max. 0.5 A

3. Technical specifications

3.1 Contact type normally open/normally closed

Contact type 1

Types PiS 3203, 3204

normally closed

Types PiS 3206, 3207

normally open

Material seal:

NBR*

Max. voltage:

48 V DC

Max. current:

0.5 A

Contact load:

10 VA

Type of protection:

IP 65 in inserted and


secured status

Plug connection:

AMP Junior-Power-Timer 2.8

2 poles

* other seals on request

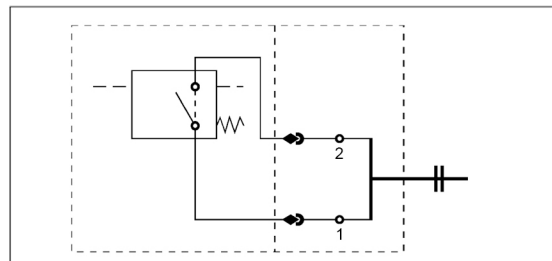

Filtration Group GmbH
 Schleifbachweg 45
 D-74613 Öhringen
 Phone +49 7941 6466-0
 Fax +49 7941 6466-429
 sales@filtrationgroup.com
 www.filtrationgroup.com
 7056311.12/2016

Electrical Maintenance Indicators

PiS 3200

with DIN plug connection

1. Features

Filter elements are economically used only if their dirt holding capacity is fully exploited. A reliable indication of the optimal time to replace the element is therefore vital.

These maintenance indicators include a DIN EN 175301-803 plug connection and are available in normally open, normally closed or change-over contact type version.

Thanks to the Filtration Group modular system these maintenance indicators can be used with all Filtration Group pressure filters.



2. Differential pressure indicators

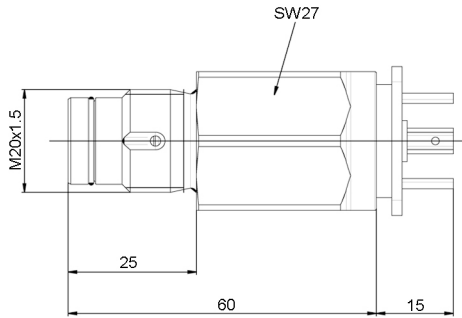


Fig. 1

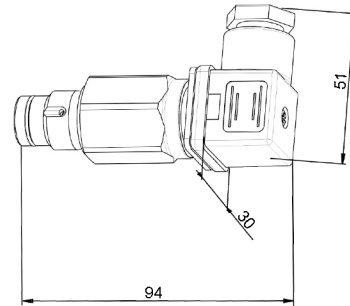


Fig. 2

Differential pressure indicators									
Nominal pressure [bar]	Temperature [°C]	Type	Order number	Indicator setting [bar]	Indication	Contact-type*	Fig.	Material housing	Material plug connection
160	-30 - +120	PiS 3209	70520470	2.2	electr.	norm. closed	1 + 2	Al	PA
		PiS 3212	70520472			norm. open	1 + 2		
		PiS 3215	70520477			3	1 + 2		
400	-30 - +120	PiS 3210	70520471	5.0	electr.	norm. closed	1 + 2	CuZn	PA
		PiS 3213	70520476			norm. open	1 + 2		
		PiS 3216	70520478			3	1 + 2		

*Contact type

- 1 Normally open or normally closed; 1 setting point; DIN EN 175301-803; max. 48 V DC; max. 0.5 A
- 3 Change-over contact; 1 setting point; DIN EN 175301-803; max. 48 V; max. 0.5 A

3. Technical specifications

3.1 Contact type normally open/normally closed

Contact type 1

Types PiS 3209, 3210

normally closed

Types PiS 3212, 3213

normally open

Material seal:

NBR*

Max. voltage:

48 V DC

Max. current:

0.5 A

Contact load:

10 VA


Type of protection:

IP 65 in inserted and secured status

Plug connection:

DIN EN 175 301-803

* other seals on request

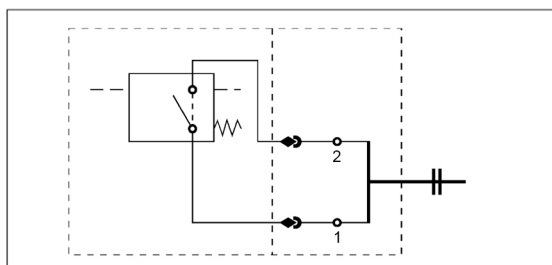


3.2 Contact type Change-over contact

Contact type 3


Types PiS 3215, 3216

change-over contact

for further technical details see 3.1

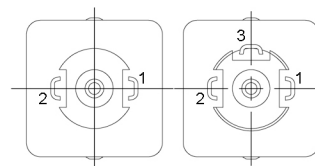

normally closed/normally open-change-over contact

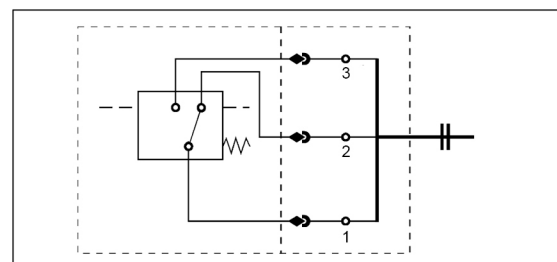

Filtration Group GmbH

Schleifbachweg 45, D-74613 Öhringen

Phone +49 7941 6466-0, Fax +49 7941 6466-429

sales@filtrationgroup.com, www.filtrationgroup.com

70563113.12/2016

Electronic maintenance indicators

PiS 3300-2.9 2SP LED

1. Features

Filter elements are economically used only if their dirt holding capacity is fully exploited. A reliable indication of the optimal time to replace the element both on the filter itself and in the plant control or monitoring system is therefore vital. In a return line filter, the flow resistance increases as a function of operating time owing to the dirt that is retained in the filter element and the differential pressure rises accordingly. The service life can now be additionally extended thanks to an intelligent monitoring device for differential pressure.

The newly developed PiS 3300-2.9 2SP LED maintenance indicator is a self-checking, microprocessor-controlled pressure switch for Filtration Group return line filters with two alarm outputs, high-intensity LEDs for all-round visibility and pulse and cold start suppression.



2. Function

An electronic pressure sensor measures the pressure continuously upstream of the return line filter element. The oil temperature is simultaneously measured by a temperature sensor. The device swaps to operation mode as soon as the filter reaches its normal service temperature ($> 30\text{ °C}$); this is indicated by the green LEDs lighting up permanently. The temperature and pressure sensors are installed in the same measuring cell, in direct contact with the hydraulic oil inside the filter. The pressure and temperature are thus measured without any intervening mechanical parts. If the oil temperature falls below 30 °C , the green LEDs flash and the alarm outputs are locked to prevent false alarms due to high viscosity during cold starts.

If the pressure in the filter reaches 2.2 bar at operating temperature because the filter element is exhausted, one alarm output (NO contact) is activated and the yellow LEDs also light up. This corresponds to 75 % of the maximum value.

At the maximum pressure value (2.9 bar), a second alarm output (NC contact) is activated and the red LEDs light up as well. It is now time to replace the filter element!

3. Technical specifications

Material:	Aluminium/plastic
Seals:	NBR*
Nominal pressure:	10 bar (144 psi)
Burst pressure:	approx. 25 bar (360 psi)
Temperature range:	-20 °C to $+85\text{ °C}$
Max. voltage:	24 V DC $\pm 10\%$
Max. current:	$< 100\text{ mA}$
Max. switching current at outputs:	1 A at 24 V DC
Cable sleeve:	M12x1
Type of protection:	IP 65
Signal suppression:	$< 30\text{ °C}$
Min. time to activate outputs:	4 s

* other seals on request

5. Order numbers

Type	Order number
PiS 3300-2.9 2SP LED	70360437

Filtration Group GmbH
 Schleifbachweg 45
 D-74613 Öhringen
 Phone +49 7941 6466-0
 Fax +49 7941 6466-429
 sales@filtrationgroup.com
 www.filtrationgroup.com
 70382747.12/2016


The switching values are much higher than with mechanical pressure switches because the sensor measures directly and extremely precisely with almost no hysteresis. This makes for more efficient use of the element capacity, so that the service life of the filter elements is prolonged and the overall costs of ownership reduced.

Short-term pressure peaks (up to 4 s) in the return line, for example owing to the high return flow rate when the tank is discharged, are suppressed to prevent false alarms.

The switching states of the electrical outputs and the LEDs remain stored when the plant is shut down until the reset button is pressed or the indicator power supply interrupted (e.g. by unplugging the cable).

This pressure indicator can be used with all MAHLE return line filters in the Pi 5000 series from size 40 to 1000.

4. Dimensions

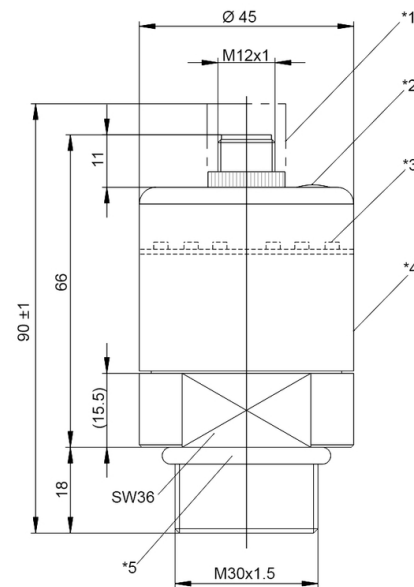


*1 = Protection cap

*2 = Reset button

*3 = LED corona

*4 = MAHLE type plate

*5 = O-Ring 26.5x3.2 NBR

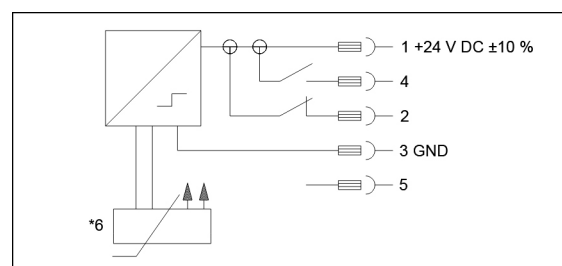

4 = Output 1

2 = Output 2

*6 = Temperature sensor

Electronic maintenance indicator PiS 3303

1. Features

Filter elements are only used economically when their dirt absorption capacity is completely exploited. For this reason, the filter and system control or monitor must reliably indicate when the filter element requires replacement. This maintenance indicator has an electrical M12 8-pole connection in accordance with IEC 61076-2-101. Thanks to the Filtration Group modular system, the electronic maintenance indicator can be used on all Filtration Group pressure filters.

Merkmale

- Analogue output signals for dynamic pressure and differential pressure in one sensor
- Switching contact 75% soiling as a pre-warning signal for replacing the filter element
- Switching contact 100% soiling as a warning signal for the filter element being exhausted
- High switching precision of the contacts to better exploit filter capacities
- Cold start suppression optional
- Worldwide distribution

2. Function

The electronic maintenance indicator is made up of two sensors which record input and output pressure at the filter. The sensor signals p1 and p2 are converted analogue-digital and processed by an electronic system controlled by micro-controller. The differential pressure dp is calculated using the difference p1-p2.

Two analogue output signals are transmitted. The first output delivers a current signal 4...20 mA proportional to the dynamic pressure p1.



The second output delivers a current signal 4...20 mA proportional to the differential pressure dp.


Two semiconductor relays K1 and K2 can be configured in the factory either as normally open or normally closed contacts. Contact K1 switches at 75% soiling level and contact K2 subsequently at 100% soiling level.

If cold start monitoring is active, the contacts do not switch at a media temperature below +30 °C.

3. Technical data


Material:	AL
Contact with media:	FKM, AL, ceramic, stainless steel
Process connection:	connecting piece M20x1.5
Electr. connection:	M12 plug-type connector, 8-pole, IEC 61076-2-101
Operating temperature:	-30 °C to +85 °C
Ambient temperature:	-40 °C to +85 °C
Storage temperature:	-40 °C to +85 °C
Humidity:	0 to 95 % rel. hum.
Soiling 100 %:	3.5 bar
Dynamic pressure p1:	0 to 25 bar
Accuracy p1:	1 % (FS 25 bar)
Differential pressure dp:	0 to 8 bar
Accuracy dp:	1 % (FS 25 bar)
Max. overload (p1, dp):	37.5 bar
Compensation range:	-10 °C bis +70 °C
Output signal (p1, dp):	4 bis 20 mA max. 600 Ω
Contact 1 (75 %):	2.6 bar
Contact 2 (100 %):	3.5 bar
Contact type:	N/O or N/C
Switching current:	200 mA
Switching delay:	5 s ±5 %
Nominal voltage:	24 V DC
Perm. operating voltage:	20 to 30 V DC
Electr. connection type:	3 conductors
Max. power consumption: with switching outputs:	2 W 8 W
Protection type:	IP 65

4. Dimensions

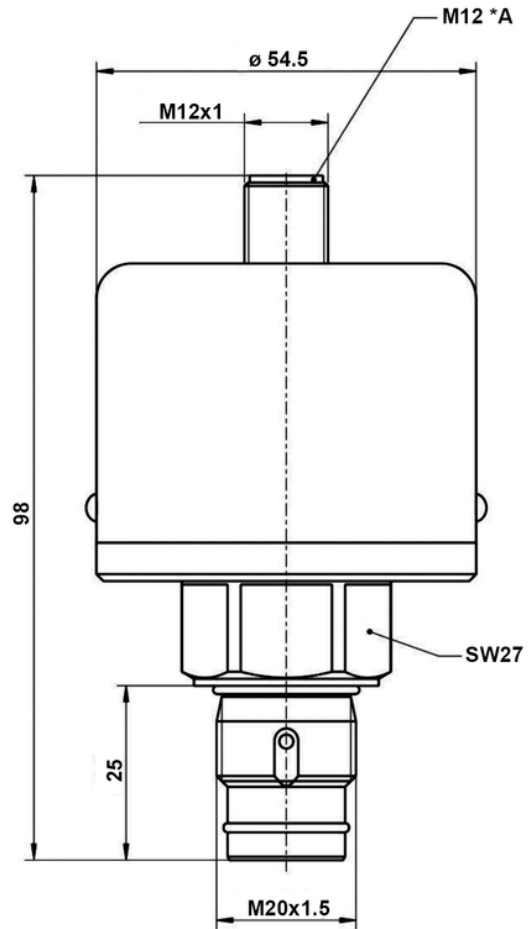

*A = Plug connection
Maximum torque 33 Nm

5. Connection

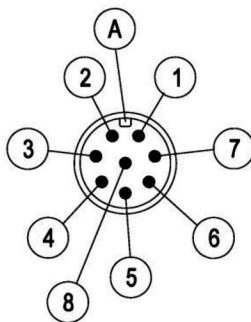

1	Supply	+Ub		white
2	Supply	GND		brown
3	Switching output K1	75 %		green
4	Output signal	p1	4 to 20 mA	yellow
5	Output signal	dp	4 to 20 mA	grey
6	Switching output K2	100 %		pink
7	Functional earth	FE		blue
8	internal use	not wired		red
A	Coding			

Filtration Group GmbH
Schleifbachweg 45
D-74613 Öhringen
Phone +49 7941 6466-0
Fax +49 7941 6466-429
sales@filtrationgroup.com
www.filtrationgroup.com
72379925.12/2016