


# Easy Troll

## Puller-pusher

## Data sheet

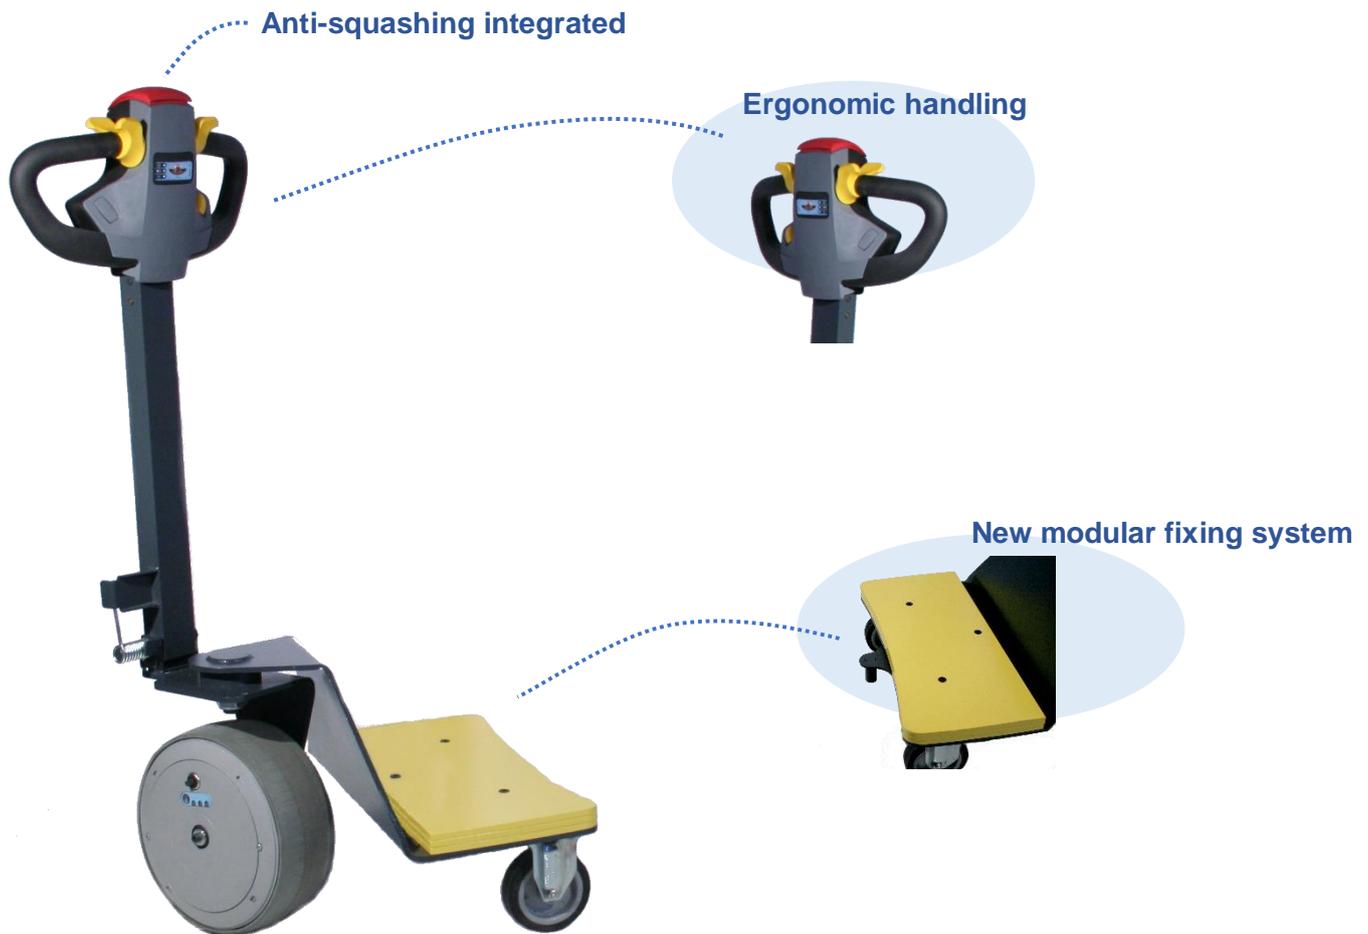

An advanced technology coupled with an easy principle are the ingredients which have permit to make the EasyTroll economical and light.

Easy to use  
Increasing handling ability  
Transport rolling loads up to 1 ton  
Reducing painful working conditions  
Adaptable and interchangeable tie down system

Rechargeable on sector through a battery charger  
Autonomy 15 km  
Pull capacity: 1.000 kg  
Adjustable speed: 3 to 6 km/h  
Gradual start  
Dimensions : H120 x L60 x P65  
Weight : 60 kg

### Quiet

The engine power and the transmission are developed to work in complete silence, in order to avoid noise pollution.

### Compact and Robust

All elements which permit the electric propulsion are integrate in the hub, loosing the totality of batteries chassis or electric casing. The aluminium fairing of the hub protects all components against impacts and spatters.

### Conditions of use

Temperatures -20 to +60°C

IP65

Maintenance >5 years

Charge time: 3 hours for 90 %

### Industrial wheel tyre



Used on industrial, asphalt, or resin type of ground.

### Power

With a peak torque of 55 Nm, the electric engine presents exceptional crossing capacities, and permits to transport heavy charges.

### Eco-friendly

The products are studied to respect the environment. The collection and recycling of the product are already organized at the end of product life.

### Universal

The wheel can be used inside or outside, with a large range of temperatures. The new fixing system permits to be compatible with the trolleys which you want to move easier.

### Medical wheel tyre *(non-marking)*



Used on a hospital type of ground, tiles, carpet, etc ...

For all further informations, you can read our catalog  
« EZ-WHEEL: the electric wheel »