

# strong and still compact up to 10000N, 60mm diameter

## **Speed and Force:**

Gear ratio	D	E	F	G	Н	
easyE-60 24VDC power supply, permanent magnet motor						
Force (dyn. push and pull) [N]	1900	4300	6600	8100	10000	
Speed at maximum load [mm/s]	26	12	8	6	5	
Current at maximum load: 24VDC = 10A						

### **Dimensions:**



Axial backlash: +/- 0.5mm General dimensional variation: +/- 1mm

Standard	Hall	Harsh Environment	Emergency lowering/spline
stroke + 358	+15	+25	+31/+10

### Features:

Stroke length: 50, 100, 150, 200, 250, 300, 350, 400, 500 and 750mm (others on request)

Cable: 1m, 2X1.3mm<sup>2</sup> (AWG16), Ø=6.4mm, black, Molex Mini-Fit Jr. 6 pin

Bending radius: 6x cable diameter

Materials: Motor and actuator tube are powder coated steel or stainless steel

Piston rod is stainless steel

Front and rear brackets are Aluminium or stainless steel

Protection class: IP66 (standard), harsh environment (according to IP68 and IP69)


Max. static load/ easyE-60: Alu/AISI: 16800N


Self locking force Depending on stroke length for push-applications

■ Temperature: -20°C to +50°C (easyE-60)

Storage: -40°C to +70°C

Duty cycle: Max. 10% or 2 minutes in use followed by 18 minutes rest

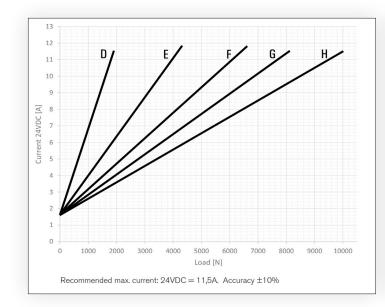

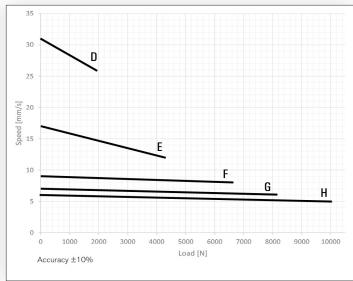

# Connecting parts:



Code: A3M (Alu) C3M (Stainless)

Max. static load: 16800N



Code: A3K (Alu) C3K (Stainless)

Max. static load: 16800N



Code: E3M (Alu) J3M (Stainless)

Max. static load: 11000N



Code: E3K (Alu) J3K (Stainless)


Max. static load: 11000N



Code: F3M (Alu)







Code: F3K (Alu) H3K (Stainless)

Max. static load: 16800N

The flyer is subject to technical alterations and printing mistakes.

